

# POWER OFFER

VALID UNTIL 30<sup>TH</sup> SEPTEMBER 2012

PRACTICAL LIGHTSETS

NKB SPEAKER SERIES

UNIVERSAL TRANSPORT-CASES



Power supply:	230 V AC, 50 Hz ~
Power consumption:	35 W
Sound-control:	via built-in microphone
LED type:	3 W / 1 W
Number of LEDs:	3 x 3 W LEDs: red, green, blue; 1 x 1 W LED: amber
Beam angle:	150°
Dimensions (LxWxH):	270 x 300 x 230 mm
Weight:	3 kg

No. 51918509

HIGH  
POWER  
LED

RGBA

**EUROLITE LED D-12 Beam effect** | RGBA Double-Derby | Beams exit from every lens, perform a circular movement and change the direction of movement at every bass-beat | 2 lens rows with a total of 12 glass-lenses provide for a room-filling effect | The color combinations change constantly, thanks to the internal program with a continuous loop | Equipped with 3 x 3 W LEDs: red, green, blue; and 1 x 1 W LED: amber



# NEW

## FUTURELIGHT DMB-60 LED Moving Head


| Extremely high light output | Very narrow illumination angle | Light beam can easily be centered and moved exactly | Supports RDM (Remote Device Management) | 13, 15 or 16 DMX channels selectable | Effect wheel with rotating 3-facet prism and 8-facet prism and frost filter | The prisms rotate in both directions and at different speeds | Color wheel with 8 different dichroic color filters plus white | Rainbow effect with adjustable speed in both directions | Gobo wheel with 11 static gobos plus open | The gobo wheel rotate in both directions

Power supply:	100-240 V AC, 50/60 Hz ~
Power consumption:	120 W/135 VA
DMX control channels:	13/15/16
DMX512 connection:	3-pin XLR
Sound-control:	via built-in microphone
Type of LEDs:	LUMINUS CBT-90
Number of LEDs:	1
Beam angle:	approx. 4°
Color-wheel:	8 dichroic filters plus open
Static gobo-wheel:	11 gobos and open
Maximum PAN-movement:	630°
Maximum TILT-movement:	270°
Dimensions (LxWxH):	340 x 250 x 430 mm
Weight:	11 kg

DMX

No. 51841801

HIGH  
POWER  
LED

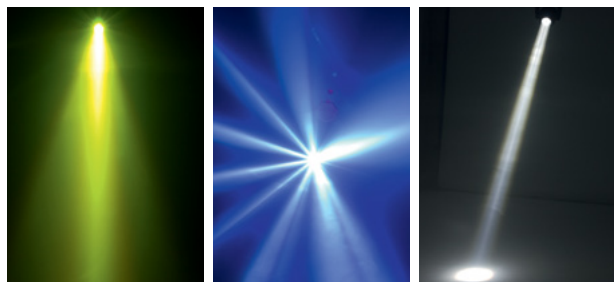

## FUTURELIGHT DMH-90 LED Moving Head


| 1 extra bright LUMINUS CBM-360 LED for best luminance | Supports RDM (Remote Device Management) | 16, 18 or 19 DMX channels selectable | Effect wheel with rotating 3-facet prism and 8-facet prism and frost filter | The prisms rotate in both directions and at different speeds | Color wheel with 8 different dichroic color filters plus white | Rainbow effect with adjustable speed in both directions | Gobo wheel with 7 rotating gobos plus open | The gobos rotate in both directions and at different speeds | All gobos can be interchanged | Slot-in gobo system for exchanging gobos without tools | With gobo shake function

Power supply:	100-240 V AC, 50/60 Hz ~
Power consumption:	200 W/215 VA
DMX control channels:	16/18/19
Type of LEDs:	LUMINUS CBM-360
Number of LEDs:	1
Beam angle:	approx. 15°
Color-wheel:	8 dichroic filters plus open
Rotating gobo-wheel:	7 gobos and open
Outside diameter of the gobos:	27 mm
Image diameter of the gobos:	22 mm
Maximum PAN-movement:	630°
Maximum TILT-movement:	270°
Dimensions (LxWxH):	320 x 250 x 430 mm
Weight:	12.5 kg

DMX

No. 51841950

HIGH  
POWER  
LED

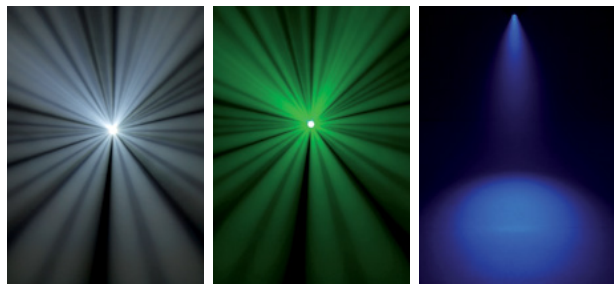

## FUTURELIGHT POS-12 LED TCL Powerstick

| 3, 4, 5, 6, 7, 9, 12, 18, or 36 DMX channels selectable for numerous applications | Equipped with 12 x 3in1 tricolor LED in the colors red, green and blue | Each LED can be controlled individually | Stepless RGB color changing | Dimmer

Power supply:	230 V AC, 50 Hz ~
Power consumption:	60 W/105 VA
DMX control channels:	3/4/5/6/7/9/12/18/36
Flash-rate:	30 Hz
Number of LEDs:	12
LED type:	3 W TCL
Dimensions (LxWxH):	990 x 135 x 80 mm
Weight:	3.75 kg


TCL

DMX


HIGH  
POWER  
LED



No. 51841364

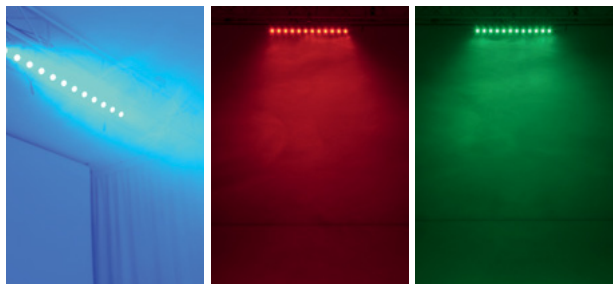



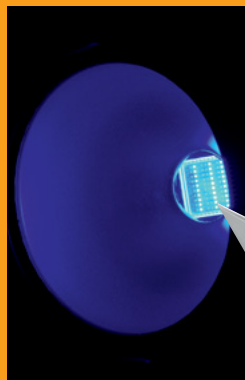

HIGH  
POWER  
LED

DMX

COB



Power supply:	230 V AC, 50 Hz ~
Power consumption:	85 W/150 VA
DMX control channels:	3/5
DMX512 connection:	3-pin XLR
Sound-control:	via built-in microphone
LED type:	Array Cluster 60 W, RGB
Number of LEDs:	1
Beam angle:	30°
Dimensions (LxWxH):	325 x 235 x 360 mm
Weight:	2.5 kg

No. 41607210 .....silver  
No. 41607235 .....black

## Fresnel lens for LED COB ML-56

No. 51913840 .....silver  
No. 51913841 .....black



## Fresnel lens for LED COB PAR-56


No. 51913842 .....silver  
No. 51913843 .....black



Fresnel lens to reduce the beam angle with high efficiency and homogeneous illumination | Please note for the installation that the line structure of the lens points outwards!

## EUROLITE LED PAR-56 COB RGB 60W

| Equipped with a powerful RGB 60 W COB LED | Functions: static colors, RGB color blend, internal programs, dimmer and strobe settings via DMX, Master/Slave | Dimmer speed (step response) adjustable | Operable in stand-alone mode or DMX interface | 3 or 5 DMX channels selectable for numerous applications | Sound-control via built-in microphone

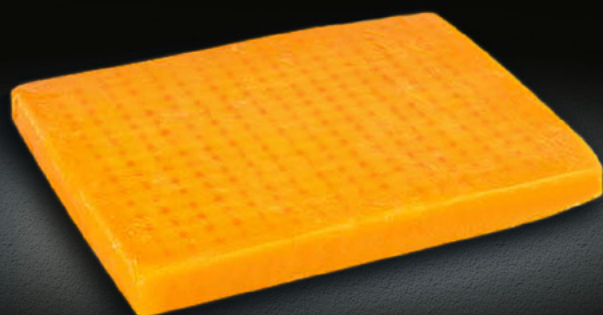

NO, IT'S NOT A  
CRACKER

It's the future of High Performance  
**Chip on Board LED technology**

## EUROLITE LED PST-15W 6000K DMX Spot

| Microphone sensitivity adjustable via rotary control | Dimmer and Strobe settings via DMX

No. 51916260



HIGH  
POWER  
LED

DMX

COB

Power supply:	230 V AC, 50 Hz ~
Power consumption:	20 W/40 VA
Number of DMX channels:	2
LED type:	Array 15 W, white
Number of LEDs:	1
Color temperature:	6000 K
LED beam angle:	5°
Dimensions:	295 x 180 x 225 mm
Weight:	1.25 kg

## EUROLITE LED TIO-1 Bar with IR


| 3 effects in one device: RGB Wash, multicolor Flower, white Flower | Functions: static colors, internal programs, dimming, strobe effect

No. 51918529



HIGH  
POWER  
LED

Power supply:	230 V AC, 50 Hz ~
Power consumption:	20 W/40 VA
Number of LEDs:	144 (48R, 48G, 48B)
Wash effect:	60 (15R, 10G, 10B, 10A, 15W)
Flower effect 1:	60 (white)
Flower effect 2:	24°
Beam angle:	500 x 175 x 160 mm
Dimensions (LxWxH):	2.75 kg
Weight:	

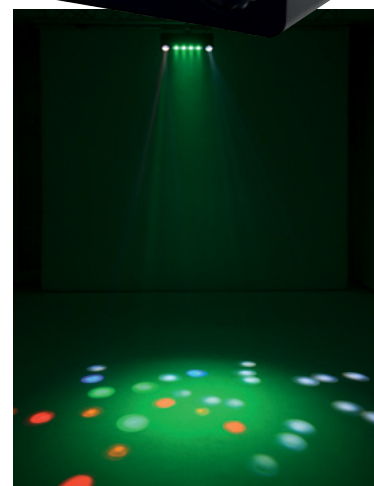

## SET (+)




1x

No. 51860350 MADRIX NEO - USB DMX512 interface+license

Lighting control software for 512 DMX/Artnet channels | USB interface for connecting devices with DMX512 interface to a PC



No. 51860160 EUROLITE LED PC-Control 1024



1x

### Set EUROLITE LED Pixel Panel 64 + Software

No. 09000043



8x EUROLITE LED Pixel Panel 64 DMX  
1x MADRIX NEO - USB DMX512 interface+license  
1x EUROLITE LED PC-Control 1024

DMX

TCL

USB

PC connect

Power supply:	230 V AC, 50 Hz ~
Power consumption:	20 W/40 VA
Number of DMX channels:	192
LED Type:	Tricolor LEDs, type SMD 5050
Number of LEDs:	64
Beam angle:	120°
Dimensions (LxWxH):	250 x 250 x 50 mm
Weight:	1.5 kg

No. 51928736 EUROLITE LED Pixel Panel 64 DMX

Pixel panel with Tri-Color LEDs | DMX-controlled or stand alone operation | Each of the 64 Tri-Color LEDs can be controlled individually | Installation on a wall or on a truss system possible



8x



## SET (+)

Power supply:	230 V AC, 50 Hz ~
Power consumption:	300 W/325 VA
DMX control channels:	15/17/24
DMX512/RDM connection:	5-pin and 3-pin XLR
Color-wheel:	5 dichroic plus white, CTO and CTB correction filters, UV-filter
Outside diameter of the gobos:	14 mm
Image diameter of the gobos:	7 mm
Maximum PAN-movement 630°:	in 1.5 s
Maximum TILT-movement 270°:	in 1.0 s
Beam angle:	approx. 15°
Length of base (including handles):	355 mm
Width of yoke:	355 mm
Height (head horizontal):	480 mm
Weight:	16 kg



No. 51836898 Flightcase for 2x PLB-5R/2x PLS-5R

1x

### Set FUTURELIGHT PLS-5R inkl. lamp + case

No. 09000042



2x FUTURELIGHT PLS-5R incl. bulb  
1x Flightcase for 2x PLB-5R/2x PLS-5R

DMX

No. 51838910 FUTURELIGHT PLS-5R incl. bulb

High-power beam with Philips Platinum 5R lamp and the multifunctionality of Moving Heads | Much higher speed and double lamp lifetime with half power input and dimensions compared to a 575 W Moving Head | RDM-ready | Very narrow illumination angle | Light beam is centered and moved exactly | Color-wheel with 9 different, dichroic color filters and white and additionally with CTO and CTB correction filters and UV filter | Gobo-wheel with 8 rotating gobos plus open | Rotating 8-facet prism



2x

## SET (+)

Power supply:	230 V AC, 50 Hz ~
Power consumption:	280 W/310 VA
DMX control channels:	11/13/16
DMX512/RDM connection:	5-pin and 3-pin XLR
Flash-rate:	13 Hz
Color-wheel:	9 dichroic plus white, CTO and CTB correction filters, UV filter
Outside diameter of the gobos:	14 mm
Image diameter of the gobos:	7 mm
Maximum PAN-movement 630°:	in 1.5 s
Maximum TILT-movement 270°:	in 1.0 s
Beam angle:	approx. 2°
Length of base (including handles):	355 mm
Width of yoke:	355 mm
Height (head horizontal):	480 mm
Weight:	14 kg

### Set FUTURELIGHT PLB-5R inkl. lamp + case


No. 09000041

2x FUTURELIGHT PLB-5R incl. bulb  
1x Flightcase for 2x PLB-5R/2x PLS-5R

DMX


No. 51838960 FUTURELIGHT PLB-5R incl. bulb

High-power beam with Philips Platinum 5R lamp and the multifunctionality of Moving Heads | Much higher speed and double lamp lifetime with half power input and dimensions compared to a 575 W Moving Head | RDM-ready | Very narrow illumination angle | Light beam is centered and moved exactly | Color-wheel with 9 different, dichroic color filters and white and additionally with CTO and CTB correction filters and UV filter | Gobo-wheel with 8 rotating gobos plus open | Rotating 8-facet prism

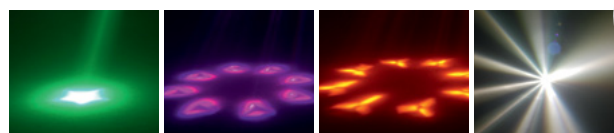

2x






DMX USB PCconnect

No. 51860160

## EUROLITE LED PC-Control 1024

| 2DMX universes | 1024 DMX-Kanäle

DMX control software PC-Control with USB interface | Lighting control software for LJs, VJs, and lighting professionals | Incl. USB interface | Automatic program generator with X-Pan, Y-Tilt and RGB effects | Graphic patch editor for DMX fixture addressing | Quick fixture profile editor with 3000 files (libraries) included | Advanced Matrix editor to allow all LED configurations | Several menu languages (French, English, German, Chinese) | Main functions: Full RGB (W/A) color + dimmer management and rendering | Graphic 2D edition of the fixtures | Up to 5120 channels with several plugged interfaces | Fade-in time between programs and scenes | Graphic and user friendly live board that can be operated by touch screen | Colors, dimmer, speed, black out and pause can be managed in live mode | Multiple program triggers | Technical features: USB 2.0 | Pilot LED to indicate the current DMX signal state | High voltage proof | DMX output speed signal can be configured for perfect DMX line stability and full compatibility with any electronic fixtures (Mab, Break, Delay, frequency 1 to 45 Hz)



DMX USB PCconnect

No. 51860150

## EUROLITE LED PC-Control 512

| 1 DMX universe | 512 DMX-Kanäle

## EUROLITE DMX Commander 24/48

| Comfortable DMX controller | 48 control channels, 24 faders, 2 pages | 36 scenes can be called directly via 12 faders, 3 pages | RDM functions

Power supply:	230 V AC, 50 Hz ~, via 9 V DC, 300 mA power unit included in the delivery
Power consumption:	3 W
Sound-control:	via built-in microphone or RCA line input (min. 100 mV)
Dimensions (WxDxH):	483 x 245 x 73 mm Rack installation with 6 U
Weight:	4 kg

No. 70064550

DMX

## EUROLITE DMX scan control 192 channels

| 192 control channels for 12 projectors with up to 16 channels | Fine Pan/Tilt movements via fine button | 6 chasers with up to 240 scenes can be programmed | Joystick

Power supply:	230 V AC, 50 Hz ~, via 9-12 V DC, 300 mA power unit included in delivery
Power consumption:	4 W
Number of control channels:	192
Free chasers:	6 x 240 scenes
Dimensions (LxWxH):	483 x 132 x 80 mm Rack installation with 3 u
Weight:	2.5 kg

No. 70064525

DMX



## EUROLITE DMX Scene Setter

| 24 control channels | 48 memorizable programs via 4 pages | 12 scenes can be called directly via the faders

Power supply:	230 V AC, 50 Hz ~, via 12 V DC, 500 mA power unit included in delivery
Power consumption:	4 W
Sound-control:	via built-in microphone or RCA line input (min. 100 mV)
Dimensions (LxWxH):	483 x 264 x 90 mm Rack installation with 6 U
Weight:	5 kg

No. 70064540

DMX


## EUROLITE DMX LED Operator 4

| Easy DMX512 control | Controls 4 LED par cans or 1 matching KLS system or 1 LED Bar (RGB 252/10) | Additional control of 1 smoke machine

Power supply:	230 V AC, 50 Hz ~, via 9-12 V DC, 300 mA power unit included in delivery
Power consumption:	3.6 W
Number of control channels:	50
Sound-control:	via built-in microphone or RCA-input
DMX512 output:	3-pin XLR connector
Dimensions (LxWxH):	320 x 190 x 60 mm
Weight:	1.4 kg

No. 70064504

DMX

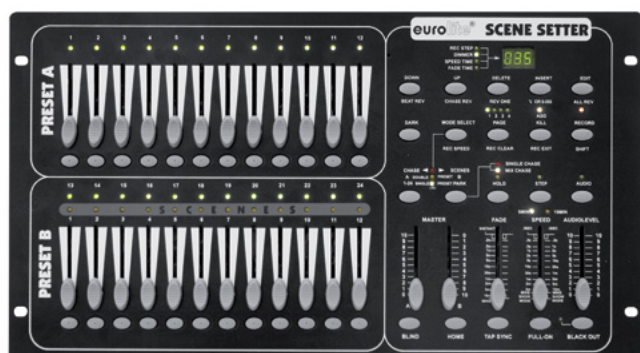

# LED LIGHTSETS WITH CASES

SET (+)

## Set EUROLITE LED PAR-64 36x5W + Case

No. 09000039 .....silver

No. 09000040 .....black

4x EUROLITE LED PAR-64 RGB 36x5W Short, silver  
4x EUROLITE LED PAR-64 RGB 36x5W Short, black  
1x Flightcase for 4x PAR-64 spot, short


DMX

HIGH  
POWER  
LED



No. 31000800

Flightcase for 4x PAR-64 spot, short

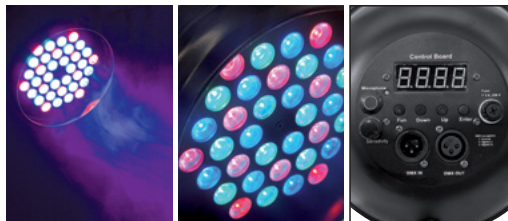

No. 51914067

EUROLITE LED PAR-64 RGB 36x5W Short

Operable in stand-alone mode or via DMX | DMX512 control possible via any commercial DMX controller (occupies 5 channels) | Adjustable microphone sensitivity via rotary control | Functions: Static colors, RGB color blend, internal programs, adjustable microphone sensitivity, dimmer and strobe settings via DMX, Master/Slave | Equipped with 36 x 5 W LEDs: 12 x red, 12 x green, 12 x blue

Power supply:	230 V AC, 50 Hz ~
Power consumption:	145 W/250 VA
DMX control channels:	5
LED type:	5 W
Number of LEDs:	36
Beam angle:	20°
Dimensions (LxWxH):	285 x 265 x 330 mm
Weight:	3 kg



SET (+)

## Set EUROLITE LED SLS-18 TCL + Case

No. 09000045

4x EUROLITE LED SLS-18 TCL 18x3W Floor  
1x Flightcase for 4x SLS, size L

DMX


TCL

HIGH  
POWER  
LED



No. 31000910

Flightcase for 4x SLS, size L

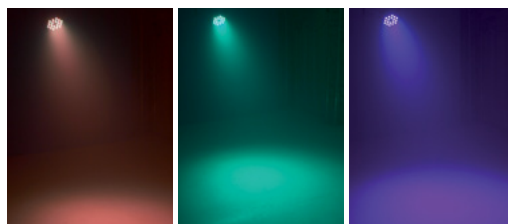

No. 51915370

EUROLITE LED SLS-18 TCL 18x3W Floor

Slimline LED spot with 18 x 3 W TCL | Equipped with 3in1 tricolor LEDs for homogeneous light output | Flat housing form requires minimal space when rigging | Second mounting bracket for safe standing installation | Comfortable addressing and setting via control panel with LED display | Functions: Static colors, RGB color blend, internal programs, dimmer, strobe, sound-control, sensitivity

Power supply:	230 V AC, 50 Hz ~
Power consumption:	60 W/110 VA
Number of DMX channels:	3/4/5/6
LED type:	3 W TCL
Beam angle:	26°
Ventilation fan:	Yes
Dimensions (WxDxH):	270 x 110 x 310 mm
Weight:	3.5 kg



SET (+)

## Set EUROLITE LED BAR-27 RGB + Case

No. 09000044

4x EUROLITE LED BAR-27 RGB 27x1W  
1x Flightcase for 4x LED BAR-252 RGB

DMX

HIGH  
POWER  
LED



No. 31001050

Flightcase for 4x LED BAR-252 RGB



No. 51930409

EUROLITE LED BAR-27 RGB 27x1W

Operable in stand-alone mode or via DMX | DMX512 control possible via any commercial DMX controller (occupies max. 12 channels) | Sound-control via built-in microphone | Comfortable addressing and setting via control panel with LCD display and four operating buttons | Functions: Static colors, RGB color blend, internal programs, dimmer and strobe settings via DMX, Master/Slave | Hanging as well as standing installation possible | Locking possibility at the mounting bracket

Power supply:	230 V AC, 50 Hz ~
Power consumption:	65 W
DMX control channels:	12
LED type:	1 W
Number of LEDs:	27
Beam angle:	12°
Dimensions (LxWxH):	1070 x 65 x 90 mm
Weight:	3 kg



Power supply:	230 V AC, 50 Hz ~
Power consumption:	15 W
DMX control channels:	4
Sound-control:	via built-in microphone
Number of LEDs:	57
Dimensions (LxWxH):	445 x 245 x 195 mm
Weight:	2.5 kg

## PD-1, PD-2, PD-3

DMX-controlled operation or stand-alone operation | Equipped with 57 LEDs: 20 x red, 17 x green and 20 x blue | Colors and strobe effect can be called up via DMX controller or DIP switches | Sound-controlled via built-in microphone | Microphone-sensitivity adjustable | via rotary-control

### EUROLITE LED PD-1 Flower effect with mirror barrel

No. 51807821

DMX



### EUROLITE LED PD-2 Flower effect with mirror

No. 51807823

DMX



### EUROLITE LED PD-3 Flower effect with three mirrors

No. 51807825

DMX



### EUROLITE LED H2O Water effect IR


| Spherical LED water effect with infrared remote-control | Fading colors and switching colorsDMX controller or DIP switches

Power supply:	230 V AC, 50 Hz ~
Power consumption:	10 W/22 VA
Number of LEDs:	1
LED type:	9 W TCL
LED beam angle:	35°
Dimensions:	135 x 165 x 170 mm
Weight:	0.5 kg

HIGH  
POWER  
LED

TCL

No. 51918701

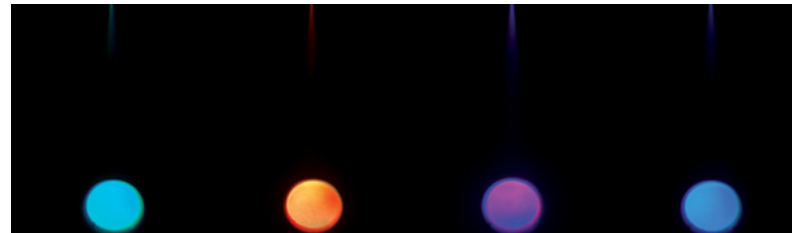

### EUROLITE LED PST-9W TCL IR


Spot | With one 9 W TCL | For illuminating mirror balls, as decoration for display windows and as party room decoration | Control via IR remote

Power supply:	230 V AC, 50 Hz ~
Power consumption:	10 W/22 VA
Number of LEDs:	1
LED type:	9 W TCL
LED beam angle:	6°
Dimensions:	135 x 165 x 170 mm
Weight:	0.5 kg

HIGH  
POWER  
LED

TCL

No. 51916202

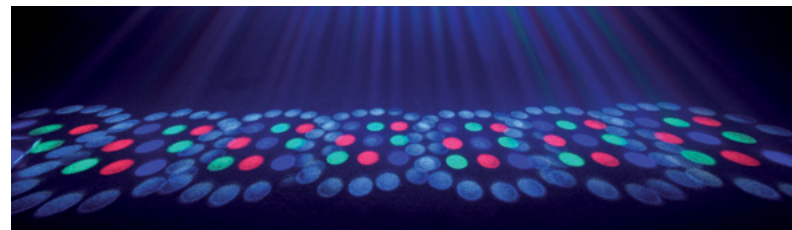

### EUROLITE LED SCY-100 Beam effect

| Classic beam effect in RGB and white | 1 row of lenses with 7 glass lenses | 27 beams exit from every lens

Power supply:	230 V AC, 50 Hz ~
Power consumption:	25 W
Number of DMX channels:	9
Number of LEDs:	189 (Rx21, Gx21, Bx21, Wx126)
LED type:	5 mm
Dimensions (LxWxH):	355 x 460 x 155 mm
Weight:	4.5 kg

DMX

No. 51918675



# NKB PLASTIC SPEAKERS



NKB-208/208A

NKB-210/210A

NKB-212/212A

NKB-215/215A

**OMNITRONIC NKB Plastic cabinets** | 2-way speaker system for PA and DJ applications | Bass reflex system | Stable plastic cabinet | Flange for stand installation | Handles

No. 11038780 .....NKB-208  
No. 11038783 .....NKB-210  
No. 11038786 .....NKB-212  
No. 11038789 .....NKB-215

Product:	NKB-208	NKB-210	NKB-212	NKB-215
Rated power:	90 W RMS	140 W RMS	160 W RMS	200 W RMS
Program power:	180 W	300 W	380 W	450 W
Components:	20 cm woofer (8"), 2.5 cm horn (1")	25 cm woofer (10"), 3.5 cm horn (1.35")	30 cm woofer (12"), 3.5 cm horn (1.35")	38 cm woofer (15"), 4.4 cm horn (1.73")
Connections:	2 x speaker	2 x speaker	2 x speaker	2 x speaker
Sensitivity:	95 dB (1 W, 1 m)	97 dB (1 W, 1 m)	97 dB (1 W, 1 m)	103 dB (1 W, 1 m)
Max. SPL:	112 dB (1 m)	120 dB (1 m)	120 dB (1 m)	123 dB (1 m)
Impedance:	8 ohms	8 ohms	8 ohms	8 ohms
Frequency range:	60 Hz - 18 kHz	55 Hz - 18 kHz	50 Hz - 18 kHz	45 Hz - 18 kHz
Dimensions (HxWxD):	400 x 255 x 220 mm	515 x 320 x 290 mm	592 x 405 x 320 mm	710 x 485 x 380 mm
Weight:	6 kg	10 kg	13 kg	20 kg



**OMNITRONIC NKB Plastic cabinets, active** | Active 2-way speaker system for PA and DJ applications | 2-way bass-reflex system with 30 cm woofer and 3.5 cm tweeter | Mic and line inputs with separate level controls | Class D circuitry

No. 11038781 .....NKB-208A  
No. 11038784 .....NKB-210A  
No. 11038787 .....NKB-212A  
No. 11038790 .....NKB-215A

ACTIVE

Product:	NKB-208A	NKB-210A	NKB-212AP	NKB-215A
Power supply:	230 V AC, 50 Hz ~	115/250 V AC, 50/60 Hz ~	90-250 V AC, 50/60 Hz ~	90-250 V AC, 50/60 Hz ~
Rated power:	90 W RMS	120 W RMS	200 W RMS	200 W RMS
Program power:	180 W	200 W	300 W	300 W
Components:	20 cm woofer (8"), 2.5 cm horn (1")	25 cm woofer (10"), 3.5 cm horn (1.35")	30 cm woofer (10"), 3.5 cm horn (1.35")	38 cm woofer (15"), 4.4 cm horn (1.73")
Storage media:			USB devices and SD(HC) cards	
Inputs:				
1 Mic:	6.3 mm jack	3-pin XLR or 6.3 mm jack	3-pin XLR or 6.3 mm jack, unbalanced	3-pin XLR or 6.3 mm jack, unbalanced
1 Line:	XLR or stereo RCA	3-pin XLR or stereo RCA	XLR or stereo RCA	XLR or stereo RCA
Outputs:				
1 Line:	6.3 mm jack	6.3 mm jack	3-pin XLR or 6.3 mm jack, unbal.	3-pin XLR or 6.3 mm jack, unbal.
Max. SPL:	105 dB (1 m)	114 dB (1 m)	114 dB (1 m)	120 dB (1 m)
Frequency range:	60 Hz - 18 kHz	55 Hz - 18 kHz	50 Hz - 18 kHz	40 Hz - 18 kHz
Dimensions (HxWxD):	400 x 255 x 220 mm	515 x 320 x 290 mm	592 x 405 x 320 mm	710 x 485 x 380 mm
Weight:	8 kg	12 kg	20 kg	22 kg





# CD/MP3 PLAYER



| Dual CD player for DJs | 2 x 40 seconds anti-shock protection | Alphanumeric LCDs with blue backlight | Easy-turning jog dials with mode selector (fast or frame search) and Pitch Bend function | Comfortable track selection via skip buttons and +10 buttons | Pitch bend buttons | Cue function | Seamless Loop/ReLoop function | Single or continuous play | Repeat function | Title programming | Indication of elapsed time, remain time or total remain time | Bargraph display | Pitch adjustment is displayed in % | Rubber buttons with color illumination | Extra large Play/Pause and Cue buttons | Digital outputs, coaxial | Rack installation | Future-proof through firmware updates

Frequency range:	20-20000 Hz
Dimensions (LxWxH):	483 x 260 x 97 mm (player units), 483 x 85 x 90 mm (control unit)
Weight:	Rack installation with 2 U 5 kg

## OMNITRONIC XCP-2800 Dual CD player

| Seamless loop | Pitch adjustment

No. 11046020

## OMNITRONIC XMP-2800 Dual CD/MP3 player

| Audio CD and MP3 CD | Seamless loop | Pitch adjustment

No. 11046025

MP3

Power supply:	115/230 V AC, 50/60 Hz ~
Power consumption:	30 W
Type:	double CD player
Available disc:	CD/-R/-RW in CD-DA format (8 and 12 cm)
Pitch adjustment:	± 8 %, ± 12 %, ± 24 %
Distortion:	0.09 %
S/N ratio:	70 dB
Analog audio output:	2 x stereo RCA/ 2 V
Digital audio output:	2 x RCA

Power supply:	110-240 V AC, 50/60 Hz ~
Power consumption:	30 W
Type:	double CD/MP3 player
Available disc:	CD/-R/-RW in CD-DA and MP3 formats (8 and 12 cm)
Pitch adjustment:	± 4 %, ± 8 %, ± 16 %
Distortion:	0.09 %
S/N ratio:	70 dB
Audio output:	2 x stereo RCA/ 2 V

## OMNITRONIC XDP-2800 Dual CD/MP3 player

| Audio CD and MP3 CD | USB and SDHC up to 32 GB | Seamless loop | Pitch adjustment

No. 11046030

MP3

USB

SD<sup>HC</sup>

Power supply:	110-240 V AC, 50/60 Hz ~
Power consumption:	30 W
Type:	double CD/USB/SD player
Available disc:	CD/-R/-RW in CD-DA and MP3 formats (8 and 12 cm)
Available storage media:	USB devices and SD(HC) cards (max. 32 GB)
Pitch adjustment:	± 4 %, ± 8 %, ± 16 %
Distortion:	0.09 %
S/N ratio:	70 dB
Audio output:	2 x stereo RCA/ 2 V

## OMNITRONIC SDP-3 SD card/USB player 2U

| Dual DJ MP3 player | USB, SDHC | Beatcounter | Instant Start | Seamless loop | Pitch adjustment | Unlimited skip protection

No. 11045003

MP3

USB

SD<sup>HC</sup>



Power supply:	230 V AC, 50 Hz ~ via supplied power unit
Power consumption:	12 W
Type:	Dual SD card/MP3 player
Data carrier:	SD and SDHC cards
USB port (type A):	2.0, downward compatible
Frame accuracy:	1/75 sec
Pitch adjustment:	± 4 %, ± 8 %, ± 16 %
Distortion:	0.006 %
S/N ratio:	98 dB
Channel separation:	98 dB
Dynamic range:	93 dB
Frequency range:	17-16000 Hz
Audio output:	2 x RCA, unbalanced
Fader start output:	2 x 3.5 mm jack (1/8")
Output level:	2 Vrms
Dimensions:	482 x 88 x 120 mm Rack installation, 2 U
Weight:	2 kg

## OMNITRONIC MMP-1 SD/USB mixer/player

| 2 players for MP3 files from SD(HC) and USB | Each channel with LCD, EQ, fader, loop and cue section | Crossfader with fader start | Mixed output or direct output for each player unit

No. 11045010

MP3

USB

SD<sup>HC</sup>




Power supply:	230 V AC, 50 Hz ~, via supplied power unit 6 V DC, 1.5 A
Power consumption:	10 W
Type:	dual SD/USB mixer/player
Storage media:	SD(HC), USB with max. 32 GB capacity
Frequency range:	17-16000 Hz
Distortion:	0.011 %
S/N ratio:	99 dB
Channel separation:	97 dB
Audio output:	2 x RCA, unbalanced
Output voltage:	2 V/ ohms
Headphones:	6.3 mm stereo jack, 80 mW/ 32 ohms
Fader start output:	2 x 3.5 mm jack (1/8")
Tone control:	
2 x High:	-26 dB to +10 dB/ 10 kHz
2 x Low:	-26 dB to +10 dB/ 100 Hz
Frame accuracy:	1/75 sec
Pitch adjustment:	± 4 %, ± 8 %, ± 16 %
Dimensions:	482 x 75 x 132 mm, rack installation, 3 U
Weight:	2.4 kg


## TRILOCK 6082 rectangle 3,5x3,5x3m

No. 09009931 .....point down


8x TRILOCK 6082-2500 3-way cross beam  
2x TRILOCK 6082 AL-33  
4x TRILOCK 6082 AL-34  
4x TRILOCK Base/wall-plate



TRILOCK 6082 AL-33  
3-way corner V right  
No. 60302400 4.9 kg



TRILOCK 6082 AL-34  
3-way corner V left  
No. 60302402 4.9 kg




TRILOCK Base/wall-plate  
QTG-male  
No. 6030189A



Made in Europe

8x




Tubes 50 x 2 mm | Braces 16 x 2 mm | Alloy  
EN-AW 6082 T6 (AlMgSi1 T6)  
No. 60302362 6082-2500 9,2 kg


## QUADLOCK 6082 rectangle 3,5x3,5x3m

No. 09009944

8x QUADLOCK 6082-2500 4-way cross beam  
4x QUADLOCK 6082L-30  
4x QUADLOCK end plate



QUADLOCK 6082L-30  
3-way-corner 90°  
No. 60306565 5.9 kg




QUADLOCK end plate  
QQG-male  
No. 6030299A 2,2 kg



Made in Europe

8x




Tubes 50 x 2 mm | Braces 16 x 2 mm | Alloy  
EN-AW 6082 T6  
No. 60306515 6082-2500 11.9 kg

## ALUTRUSS Steel base plate round type A

No. 60320330 .....silver

No. 60320331 .....black

Made in Europe

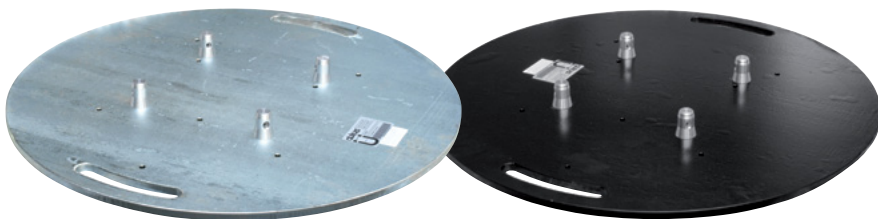

Dimensions: 800 x 16 mm  
Weight: approx. 60 kg

## ALUTRUSS Steel base plate rectangle type B

No. 60320335

Made in Europe



Dimensions: 800 x 800 x 16 mm  
Weight: approx. 75 kg



# CASES



## Universal tour case ODV-1 with wheels 120 cm

No. 30126412

Maximum load:	100 kg
Strength:	10 mm
Outside dimensions:	1250 x 600 x 760 mm
Inside dimensions:	
Mounting width:	1200 mm
Mounting height:	590 mm
Mounting depth:	545 mm
Outer dimensions/corners:	75 mm
Weight:	37 kg



## Universal tour case with casters 60 cm | Individual separation of the interior via two dividers

No. 30126415

Maximum load:	60 kg
Strength:	9 mm
Outside dimensions:	approx. 640 x 610 x 770 mm
Inside dimensions:	
Mounting width:	approx. 590 mm
Mounting height:	approx. 580 mm
Mounting depth:	approx. 550 mm
Outer dimensions/corners:	approx. 75 mm
Weight:	approx. 33 kg

High-quality workmanship with 9 mm plywood multilayered glued, black laminated | Interior and cover (non-removeable) with black felt cover | Aluminum profile frames | Three-leg, large steel ball corners | 4 castors (100 mm), 2 of which with locking brakes | 4 hinged, zinc-plated case handles | 2 large lockable butterfly locks | Optional dividers and drawer box sold separately



| High-quality workmanship with 7 mm plywood multilayered glued, black laminated | Interior and cover (non-removeable) with black felt cover | 2 chromium plated strut hinges | Aluminum profile frames (30 mm) with rounded edges | Three-leg, large steel ball corners for stacking | 2 large butterfly locks (w/o locking function) | 2 hinged, chromium plated case handles

Product:	60 x 40 cm	80 x 40 cm	80 x 60 cm	120 x 40 cm
Maximum load:	25 kg	50 kg	50 kg	50 kg
Strength:	7 mm	7 mm	7 mm	7 mm
Outside dimensions:	ca. 615 x 415 x 445 mm	ca. 815 x 415 x 455 mm	ca. 815 x 615 x 455 mm	ca. 1215 x 415 x 455 mm
Weight:	9.5 kg	11.5 kg	15 kg	15 kg

## Universal transport case

No. 30126710 .....60 x 40 cm  
No. 30126715 .....80 x 40 cm  
No. 30126720 .....80 x 60 cm  
No. 30126725 .....120 x 40 cm

## Universal-Transport case R-7, heavy 120x40cm

No. 30126767

Maximum load:	100 kg
Strength:	9 mm
Outside dimensions:	1220 x 420 x 440 mm
Interior dimensions:	
Mounting width:	1180 mm
Mounting depth:	365 mm
Mounting height:	410 mm
Outer dimensions/corners:	54 mm
Weight:	20 kg




High-quality workmanship with plywood multilayered glued, black laminated | Interior and cover (non-removeable) with black felt cover | 3 chromium-plated strut hinges | Aluminum profile frames (30 mm) with rounded edges | Three-leg, large steel ball corners for stacking | 2 large butterfly locks (w/o locking function) | 2 hinged, chromium plated case handles | 4 castors (100 mm)

# SALE

**OMNITRONIC GCA-6 Ceiling speaker 60W/pair** | High-performance 2-way system | For 8-ohm and 100 V systems | Wide frequency response and bass response

No. 80710117 .....560S

No. 80710120 .....560A

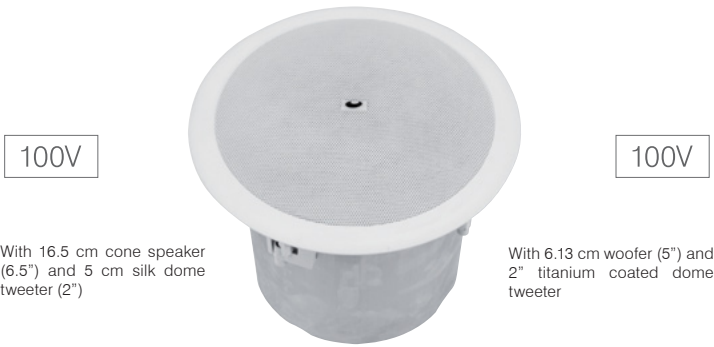

**OMNITRONIC MEP-115 Earphone** | Stetoscope shape | Mono | 3.5 mm mono jack

No. 13062100



**EUROLITE LED BAR-648 RGB 5mm** | 648 x 5 mm RGB-LEDs | 8 LED segments independently controllable

No. 51913856



**RUBBERLIGHT LED RL1-230V yellow/green 44m** | Rich color intensity | Extremely flexible lighttube

No. 50506235

IP outdoor use



**OMNITRONIC GCS Ceiling speaker pair** | 2-way system | For 8-ohm and 100 V systems | Steel firedome for safety in case of fire

No. 80710111 .....GCS-530, 30W

No. 80710114 .....GCS-510, 10W



**OMNITRONIC GCP Ceiling speaker pair** | 20 cm cone speaker (8") for excellent audio quality | 100 V transformer with 2 power taps and 8-ohm connection | Installation via drill holes in the housing

No. 80710105 .....GCP-805, 5W

No. 80710108 .....GCP-810, 10W



**EUROLITE RGB-300 MR-16 GU-10 mini spot** | The extraordinary pinspot | High-quality housing for high stability | For RGB lamps

No. 50850360



**EUROLITE TB-5 DMX roller** | For 250 W halogen lamp, G 6,35 | Gobo wheel with 9 gobos and open | With gobo shake function | Manual focus

No. 51785835

